

A

B

C



D

E

F

REV	DESCRIPTION	DESIGN	DATE
A0	Release	吴丹平	2013.08.05

1

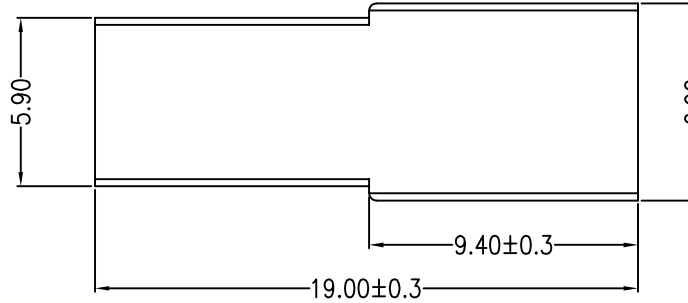

2

主要技术参数 Main Specifications

线 数 (Poles): 02

接触电阻 (Contact resistance): $\leq 20m\Omega$

绝缘电阻 (Insulation resistance): $\geq 1000M\Omega$



额定电压 (Rated voltage): 250V AC DC

额定电流 (Rated current): 3.0A AC DC

耐 电 压 (Withstand Voltage): 1000V AC/minute

温度范围 (Temperature Range): $-25^{\circ}C \sim +85^{\circ}C$

3

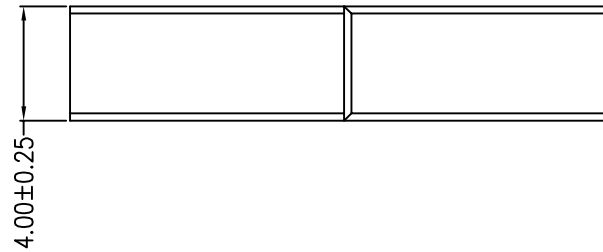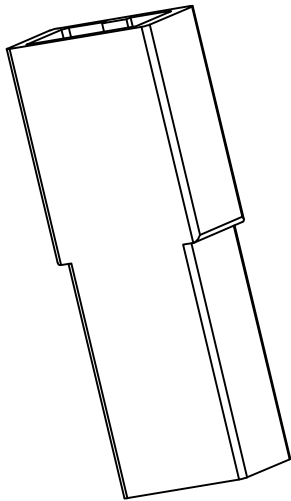

4

ORDER INFORMATION:

C2502R-02-A5W-P

PART No. _____

No. FOR CIRCUITS: _____

02

PACKAGING:

P=PE

PLASTIC MATERIAL:

A5W=PA66 (BEIGE)

A5R=PA66 (RED)


1

2

3

4

5

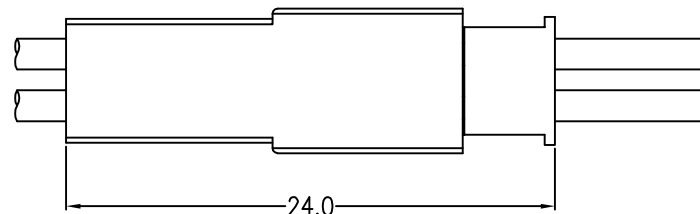

Assembly Layout

A

B

C

D

E

F

C				
B				
A	PEDESTAL	1 PCS	PA66	
ITEM	COMPONENT	Q'TY	MATERIAL	FINISH
JKUN 温州健坤接插件有限公司 WENZHOU JKUN CONNECTOR CO., LTD.				TITLE: -
X.±0.5	X.±5'	USE:	CUSTOMER	PART NO.:
.X±0.3	.X±2'	APPD:	邵敬和	C2502R-02-A5W-P
.XX±0.25	.XX±1'	CHKD:	田峰	DWG NO.:
--	--	DR:	吴丹平	JKUN/GCCP-0599
	UNITS:			SCALE
	mm			1 : 1
				SHEET
				1 / 1