

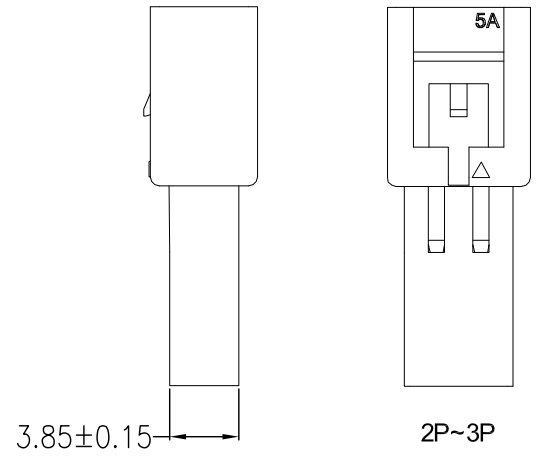


| REV | DESCRIPTION | DESIGN | DATE |
|-----|-------------|--------|------------|
| A0 | NEW RELEASE | 蒋建银 | 2016/05/20 |

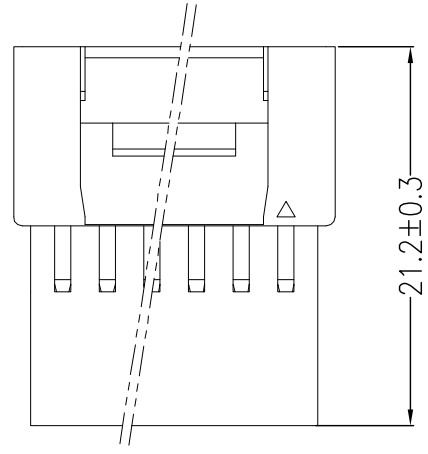


Specifications:

Contact resistance: $\leq 10m\Omega$
 Insulation resistance: $\geq 1000M\Omega$
 Rated voltage: 250V AC DC
 Rated current: 3.0A AC DC
 Withstand Voltage: 1000V AC/minute
 Temperature Range: $-25^{\circ}C \sim +85^{\circ}C$
 Housing: PA66, WHITE

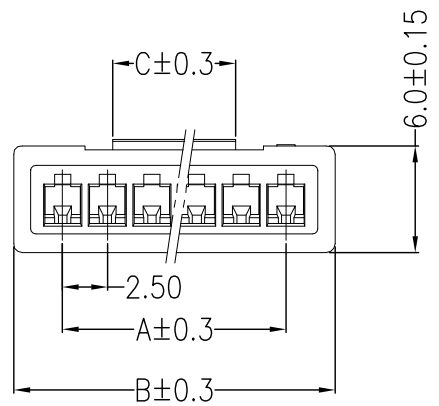

| Part No. | Dimensions mm | | |
|-----------|---------------|-------|------|
| | A | B | C |
| C2507R-02 | 2.50 | 8.00 | 1.0 |
| C2507R-03 | 5.00 | 10.50 | 1.0 |
| C2507R-04 | 7.50 | 13.00 | 1.9 |
| C2507R-05 | 10.00 | 15.50 | 1.9 |
| C2507R-06 | 12.50 | 18.00 | 6.9 |
| C2507R-07 | 15.00 | 20.50 | 9.4 |
| C2507R-08 | 17.50 | 23.00 | 11.9 |
| C2507R-09 | 20.00 | 25.50 | 11.4 |
| C2507R-10 | 22.50 | 28.00 | 16.9 |
| C2507R-11 | 25.00 | 30.50 | 19.4 |
| C2507R-12 | 27.50 | 33.00 | 21.9 |
| C2507R-13 | 30.00 | 35.50 | 24.4 |
| C2507R-14 | 32.50 | 38.00 | 26.9 |
| C2507R-15 | 35.00 | 40.50 | 29.4 |

ORDER INFORMATION:

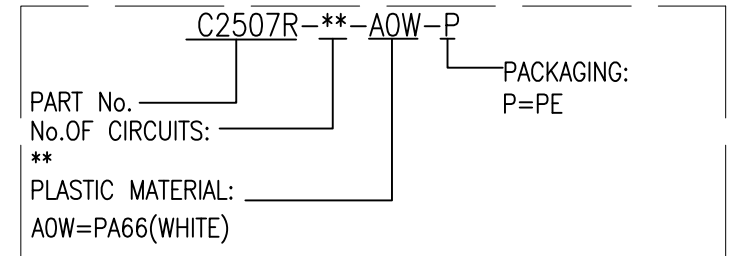

JKUN 温州健坤接插件有限公司
 WENZHOU JKUN CONNECTOR CO.,LTD.

| | |
|-----------|-----------------|
| TITLE: | SMH250-*R |
| PART NO.: | C2507R-**-A0W-P |
| DWG NO.: | JKUN-GCCP-0768 |
| SCALE | 1 : 1 |
| SHEET | 1 / 1 |

| GENERAL TOLERANCE | | USE: |
|-------------------|----------------------|-----------|
| X. ± 0.50 | X. $\pm 5^{\circ}$ | CUSTOMER |
| X.X ± 0.30 | X.X $\pm 2^{\circ}$ | APPD: 刘振岭 |
| X.XX ± 0.20 | X.XX $\pm 1^{\circ}$ | CHKD: 王亮 |
| | UNITS: mm | DR: 蒋建银 |