

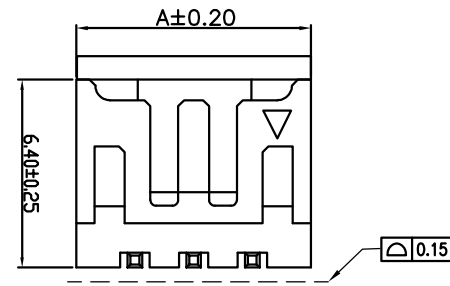
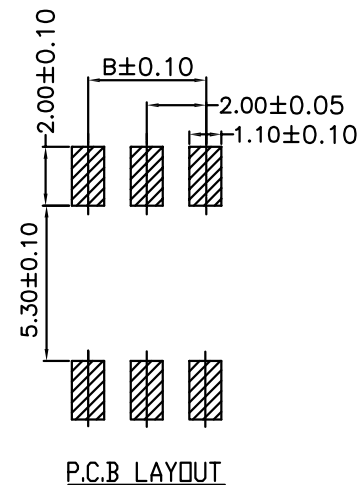




REV	DESCRIPTION	DESIGN	DATE
A0	Release	蒋建银	2016.11.22

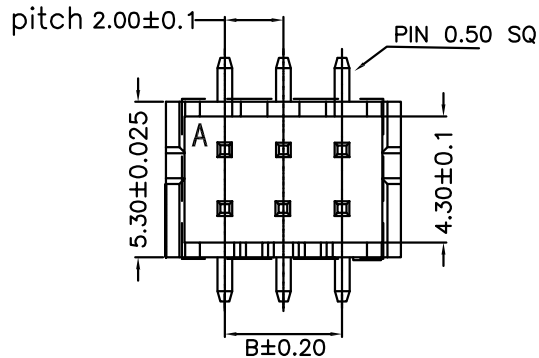

主要技术参数 Main Specifications

- 线数 (Poles): 04 to 40
- 接触电阻 (Contact resistance): $\leq 10m\Omega$
- 绝缘电阻 (Insulation resistance): $\geq 1000M\Omega$
- 额定电压 (Rated voltage): 250V AC DC
- 额定电流 (Rated current): 3A AC DC
- 耐电压 (Withstand Voltage): 800V AC/minute
- 温度范围 (Temperature Range): $-40^{\circ}C \sim +105^{\circ}C$

ORDER INFORMATION:

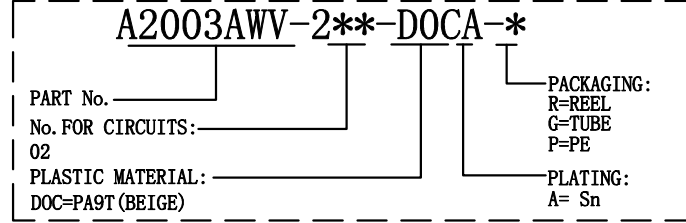

2P 视图

Circuits	Dimensions (mm)		Circuits	Dimensions (mm)	
	DIM. A	DIM. B		DIM. A	DIM. B
202 (2X2)	6.00	2.00	212 (2X12)	26.00	22.00
203 (2X3)	8.00	4.00	213 (2X13)	28.00	24.00
204 (2X4)	10.00	6.00	214 (2X14)	30.00	26.00
205 (2X5)	12.00	8.00	215 (2X15)	32.00	28.00
206 (2X6)	14.00	10.00	216 (2X16)	34.00	30.00
207 (2X7)	16.00	12.00	217 (2X17)	36.00	32.00
208 (2X8)	18.00	14.00	218 (2X18)	38.00	34.00
209 (2X9)	20.00	16.00	219 (2X19)	40.00	36.00
210 (2X10)	22.00	18.00	220 (2X20)	42.00	38.00
211 (2X11)	24.00	20.00			

ITEM	COMPONENT	Q'TY	MATERIAL	FINISH
C				
B	CONTACT	2 PCS	BRASS	Sn-plated
A	HOUSING	1 PCS	PA9T	UL 94V-0, COLOR:BEIGE

JKUN温州健坤接插件有限公司 WENZHOU JKUN CONNECTOR CO., LTD.			TITLE: - 2.0mmPITCH 180°WAFER SMT TYPE	
X.±0.5	X.±5'	USE: CUSTOMER	PART NO.:	
.X±0.3	.X±2'		A2003AWV-2**-DOCA-*	
.XX±0.25	.XX±1'	APPD: 王亮	DWG NO.:	
--	--	CHKD: 曾令青	JKUN/GCCP-0818	
UNITS: mm		DR: 蒋建银	SCALE	SHEET
			1 : 1	1 / 1